

Sarc7: Evaluating Sarcasm Detection and Generation with Seven Types and Emotion-Informed Techniques

Lang Xiong Raina Gao Alyssa Jeong Yicheng Fu

Kevin Zhu Sean O'Brien Vasu Sharma

Algoverse AI Research

langlglang@gmail.com, rainatg9@gmail.com, alyssa.y.jeong@gmail.com,
easonfu@stanford.edu, kevin@algoverse.us, sean@algoverse.us,
sharma.vasu55@gmail.com

Abstract

Sarcasm is a complex linguistic and pragmatic phenomenon where expressions convey meanings that contrast with their literal interpretations, requiring sensitivity to the speaker’s intent and context. Accurately classifying and generating sarcasm is critical for improving large language models’ (LLM) understanding of human intent. We introduce **Sarc7**, a benchmark for fine-grained sarcasm evaluation based on the MUSTARD dataset, annotated with seven pragmatically defined sarcasm types: self-deprecating, brooding, deadpan, polite, obnoxious, raging, and manic. These categories are adapted from prior linguistic work and used to create a structured dataset suitable for LLM evaluation. For classification, we evaluate multiple prompting strategies—zero-shot, few-shot, chain-of-thought (CoT), and a novel emotion-based technique—across five major LLMs. Emotion-based prompting yields the highest macro-averaged F1 score of 0.3664 (Gemini 2.5), outperforming CoT for several models and demonstrating its effectiveness in sarcasm type recognition. For sarcasm generation, we design structured prompts using fixed values across four sarcasm-relevant dimensions: incongruity, shock value, context dependency, and emotion. Using Claude 3.5 Sonnet, this approach produces more subtype-aligned outputs, with human evaluators preferring emotion-based generations 38.46% more often than zero-shot baselines. Sarc7 offers a foundation for evaluating nuanced sarcasm understanding and controllable generation in LLMs, pushing beyond binary classification toward interpretable, emotion-informed language modeling.

1 Introduction

Sarcasm is defined as the use of remarks that convey the opposite of their literal meaning. Understanding sarcasm requires an intuitive grasp of humor and social cues, posing a challenge for natural language processing (NLP) tasks such as human-like conversation (Yao et al., 2024; Gole et al., 2024). Sarcasm is a pragmatic act, where meaning depends not only on words but also on speaker intent, emotional tone, and shared context. Large language models (LLMs) generally perform poorly on sarcasm classification and generation tasks due to the subtlety and context dependence of sarcastic language Yao et al. (2024). Traditional sentiment analysis and machine learning techniques also struggle with these challenges. This work introduces a novel sarcasm benchmark grounded in the seven recognized types of sarcasm and proposes an emotion-based approach for both classification and generation. We examine whether LLMs can demonstrate pragmatic reasoning. In contrast to prior rule-based and template-driven methods, which often produced rigid outputs Zhang et al. (2024), and even more recent deep learning models that still fall short in capturing subtlety and social nuance Gole et al. (2024), our technique aims to improve contextual relevance and expressive range in sarcastic generation.

2 Related Work

Previously, SarcasmBench [Zhang et al. \(2024\)](#) established benchmarks for binary sarcasm classification by evaluating state-of-the-art (SOTA) large language models (LLMs) and pretrained language models (PLMs). [Leggitt & Gibbs \(2000\)](#); [Biswas et al. \(2019\)](#). Lamb (2011) first introduced a seven-type classification of sarcasm based on observational studies of classroom discourse. [Qasim \(2021\)](#) then refined these categories into operational definitions tailored for social-interview data, providing clear examples and criteria. [Zuhri & Sagala \(2022\)](#) subsequently applied this refined taxonomy in an irony and sarcasm detection system for public-figure speech. Building on this lineage, we translate those high-level categories into concrete, example-driven definitions and detailed annotation guidelines to construct and evaluate our Sarc7 benchmark for LLMs.

Current benchmarks do not address specific sarcasm-type classification or generation, or emotion as a controlled factor. Emotion and sarcasm are directly correlated, as sarcasm is emotionally fueled and reflects the speaker’s emotion, both intentionally and unintentionally.

Sarcasm Classification: [Riloff et al. \(2013\)](#) introduced a sentiment-contrast framework for binary sarcasm detection, flagging instances where positive wording clashes with negatively described contexts. Recent advances have focused on structured prompting techniques that use pragmatic reasoning to enhance sarcasm detection [Lee et al. \(2024\)](#). Approaches such as pragmatic metacognitive prompting method (PMP) have improved model performance by making sarcasm inference more explicit [Yao et al. \(2024\)](#); [Lee et al. \(2024\)](#). Furthermore, recent studies have shown that integrating commonsense, knowledge, and attention mechanisms help models identify subtleties in sarcastic statements [Zhuang et al. \(2025\)](#). These methods show that guiding LLMs with structured signals can help them better understand the nuances of sarcastic statements.

Sarcasm Generation: Recent studies have introduced controlled generation methods to guide LLMs toward producing sarcastic statements using contradiction strategies and dialogue cues [Zhang et al. \(2024\)](#); [Helal et al. \(2024\)](#). Structured prompting and contradiction-based strategies have shown to improve sarcasm generation. Some methods guide LLMs by introducing contrast between expected and actual meanings or using contextual dialogue cues for coherence [Zhang et al. \(2024\)](#); [Helal et al. \(2024\)](#); [Skalicky & Crossley \(2018\)](#). However, existing techniques struggle with controlling sarcasm levels and aligning them with contextual incongruence, shock value, and prior context dependency.

3 Methods

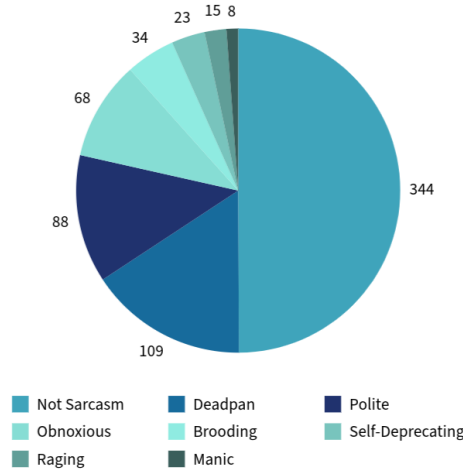


Figure 1: Distribution of Annotation Labels in the Dataset.

3.1 Benchmark Construction

We introduce **Sarc7**, a novel benchmark for fine-grained sarcasm classification and generation. Building on the MUSTARD dataset (Castro et al., 2019), which provides binary sarcasm annotations for short dialogue segments, we manually annotated each sarcastic utterance with one of seven distinct sarcasm types: *self-deprecating*, *brooding*, *deadpan*, *polite*, *obnoxious*, *raging*, and *manic*.

These seven categories are inspired by the linguistic taxonomy proposed in Qasim (2021), which identified common sarcasm types based on pragmatic and affective features. Our contribution lies in implementing these types of sarcasm for computational annotation. We defined each type using precise, example-grounded criteria suitable for large language model evaluation, and we applied this schema to build the first sarcasm benchmark that captures this level of granularity.

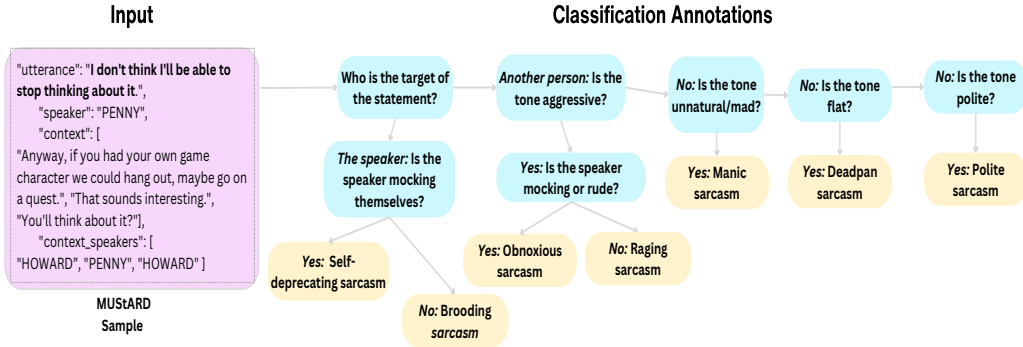


Figure 2: Flowchart of the Step-by-Step Process for Sarcasm Classification Annotation

3.2 Annotation Methodology

Each sarcastic utterance in the MUSTARD dataset (n=690) was independently labeled by four trained annotators using the seven sarcasm subtypes defined in Sarc7. Annotators were instructed to consider pragmatic cues and received detailed definitions and examples of each category (see Table 1) to ensure consistent interpretation. The annotation process is illustrated in Figure 2.

- Each utterance was first labeled independently by all four annotators.
- If at least three annotators agreed on the same label, that label was accepted as the final annotation.
- In cases with no 3-out-of-4 agreement, a consensus discussion was held between annotators, with a final decision made by majority vote.

To quantify the reliability of our 3-of-4 consensus labels, we recruited a fifth trained annotator to re-label all utterances independently. We then computed Cohen’s kappa between the majority vote (from the original four annotators) and this fifth annotator’s labels. The resulting Cohen’s $\kappa = 0.6694$ indicates substantial agreement according to Landis & Koch (1977) scale. The macro-averaged precision, recall, and F1 for this human comparison were 0.6586, 0.6847, and 0.6663, respectively. This provides further evidence that our annotation schema is both consistent and replicable.

Even for trained readers, **brooding**, **deadpan**, and **polite** sarcasm proved the most challenging to label consistently, establishing realistic upper bounds for model performance on these subtypes.

Figure 1 shows the distribution of the seven annotated sarcasm types. The resulting Sarc7 benchmark supports two tasks: (1) multi-class sarcasm classification, and (2) sarcasm-type-

conditioned generation. These tasks allow for more fine-grained evaluation of sarcasm understanding in large language models.

3.3 Task Definition

We define two primary evaluation tasks:

- **Sarcasm Classification:** Given a sarcastic utterance and its dialogue context, correctly predict the dominant sarcasm type from among the seven annotated categories.
- **Sarcasm Generation:** Generate a sarcastic utterance consistent with one of the 7 types of sarcasm. Table 1 outlines definitions for each sarcasm category in the Sarc7 benchmark.

Type	Definition	Example
Self-deprecating	Mocking oneself in a humorous or critical way.	"Oh yeah, I'm a genius — I only failed twice!"
Brooding	Passive-aggressive frustration masked by politeness.	"Sure, I'd love to stay late again — who needs weekends?"
Deadpan	Sarcasm delivered in a flat, emotionless tone.	"That's just the best news I've heard all day."
Polite	Insincere compliments or overly courteous remarks.	"Wow, what an <i>interesting</i> outfit you've chosen."
Obnoxious	Rude or provocative sarcasm aimed at others.	"Nice driving! Did you get your license in a cereal box?"
Raging	Intense, exaggerated sarcasm expressing anger.	"Of course! I <i>love</i> being yelled at in meetings!"
Manic	Overenthusiastic, erratic sarcasm with chaotic tone.	"This is AMAZING! Who needs food or sleep anyway?!"

Table 1: Operational Definitions and Examples of the Seven Sarcasm Types used in Sarc7

3.4 Baseline Classification

Our baseline testing focused on zero-shot, few-shot, and chain-of-thought (CoT) prompting.

- **Zero-shot:** The model classifies the utterance with only a definition of the sarcasm types and no examples.
- **Few-shot** The model is provided with the definitions of the sarcasm types and a few examples of correct classifications within the prompt to guide its response.
- **CoT:** The model is provided with the definitions of the sarcasm types and is prompted to break down its reasoning into steps, with examples that also show the reasoning process.

Our novel emotion-based prompting method is detailed separately in Section 3.5, as it introduces a unique reasoning framework based on affective incongruity. For generations, baseline outputs were produced using a zero-shot prompt, without structured control over dimensions. These baselines were evaluated by a human grader based on accuracy of sarcasm type and emotion.

3.5 Emotion-Based Prompting

To make the model’s pragmatic reasoning more explicit and explainable, our emotion-based prompting method operationalizes the detection of emotional incongruity. This can be viewed as a pragmatic consistency check, where the model must reason about the expected emotion of a context versus the expressed emotion of an utterance. Our emotion-based prompting goes beyond traditional sentiment analysis by leveraging discrete emotion categories rather than coarse positive/negative polarity. This method captures pragmatic

incongruity through emotional mismatches, approximating listener inference. Whereas sentiment classifiers typically flag a mismatch between overall sentiment and context [Riloff et al. \(2013\)](#), our approach leverages the six basic emotions identified by American psychologist Paul Ekman: happiness, sadness, anger, fear, disgust, and surprise [Ekman \(1992\)](#). Our emotion-based prompting technique consists of three main steps: 1) Categorize the emotion of the context. 2) Classify the emotion of the utterance. 3) Identify the sarcasm based on the incongruity of the emotional situation. By comparing these two emotion labels, we capture nuanced contrasts—such as polite sarcasm pairing happiness with a neutral situation or obnoxious sarcasm pairing neutral context with a superficially disgusting utterance—that a simple positive/negative split cannot distinguish. This fine-grained emotional reasoning provides a clear advantage for multi-class sarcasm classification: it supplies subtype-specific cues (e.g., “raging” sarcasm requires anger, “manic” requires surprise or happiness) and thus helps disambiguate among several closely related sarcasm types rather than collapsing them all into a single sarcastic category.

Subtype	Incongruity (1–10)	Shock Value	Context Dependency	Emotion
Self-deprecating	3–5	low	medium	sadness
Brooding	5–7	medium	medium	anger
Deadpan	4–6	low	high	neutral
Polite	3–5	low	medium	happiness
Obnoxious	6–9	high	low	disgust
Raging	7–9	high	low	anger
Manic	5–7	high	medium	surprise

Table 2: Dimension Settings and Target Emotion for Each Sarcasm Subtype used in our Emotion-based Prompting.

3.6 Generation Dimensions

A key pillar of explainability and controllability in LLMs is the ability to steer their outputs in a predictable manner. Our approach moves beyond general sarcasm generation by conditioning the model on four controllable pragmatic dimensions intended to guide the tone, intensity, and context of the output:

- **Incongruity:** Degree of semantic mismatch (1-10).
- **Shock Value:** Intensity of sarcasm.
- **Context Dependency:** Reliance on conversational history.
- **Emotion:** One of Ekman’s six basic emotions (e.g., anger, sadness).

Rather than tuning these dimensions dynamically, we assigned fixed values for each subtype based on our intuitive understanding (see Table 2). We opted for fixed values for each subtype to create a controlled and interpretable baseline for generation. This approach allows us to directly test a model’s ability to adhere to explicit pragmatic instructions, whereas a data-driven approach would conflate feature extraction with generation quality. By anchoring each generation to these abstract but interpretable cues, we observed improved alignment between the generated outputs and their intended sarcasm type. This structured prompting approach helps control for variation in tone and emotional affect, resulting in more consistent and subtype-specific sarcasm generation. A sample output from this technique is shown in Figure 3.

4 Experiments

4.1 Model Selection

We evaluate several state-of-the-art language models on our proposed sarcasm benchmark, including GPT-4o [OpenAI \(2024\)](#), Claude 3.5 Sonnet [Anthropic \(2024\)](#), Gemini 2.5 [DeepMind et al. \(2023\)](#), Qwen 2.5 [Team \(2024\)](#), and Llama 4 Maverick [Meta AI \(2024\)](#).



Figure 3: Sample Output Using Emotion-based Generation Method

4.2 Evaluation

We evaluated classification by comparing model predictions to human-annotated labels across seven sarcasm types. For generation, Claude 3.5 Sonnet produced 100 sarcastic statements per prompting method, each rated by a human for sarcasm type accuracy.

5 Results and Discussion

Model	0-shot	Few-shot	CoT	Emotion-based
GPT-4o	47.73%	50.29%	55.07%	48.94%
Claude 3.5 Sonnet	51.16%	52.61%	57.10%	52.32%
Qwen 2.5	41.45%	46.96%	46.09%	45.94%
Llama-4 Maverick	34.20%	35.51%	50.29%	49.86%
Gemini 2.5	46.81%	47.97%	53.04%	52.03%

Table 3: Classification Accuracy Across Models and Prompting Techniques

5.1 Classification Results

Across all evaluated prompting techniques, CoT prompting consistently outperformed zero-shot, few-shot, and emotion-based approaches in sarcasm classification. Table 3 shows its superior results compared to other methods in almost every model.

Model	0-shot F1	Few-shot F1	CoT F1	Emotion-based F1
GPT-4o	0.2089	0.3255	0.2674	0.2233
Claude 3.5 Sonnet	0.2964	0.3487	0.2471	0.3487
Qwen 2.5	0.2116	0.2075	0.2052	0.2124
Llama-4 Maverick	0.2184	0.2340	0.2040	0.2841
Gemini 2.5	0.2760	0.3274	0.3141	0.3664

Table 4: Macro-averaged F1 scores of Models Across Prompting Techniques.

In terms of macro-averaged F1 score, emotion-based prompting outperformed zero-shot, few-shot, and chain-of-thought (CoT) prompting. As shown in Table 4, Gemini 2.5 achieved the highest F1 score overall under emotion-based prompting, with Claude 3.5 Sonnet, Llama-4 Maverick, and Qwen 2.5 also seeing gains relative to their CoT performance. While CoT prompting remains strong in absolute accuracy and reasoning through ambiguous cases, emotion-based prompting demonstrated greater ability to generalize across sarcasm types, especially those associated with emotional signals.

This improvement is particularly important given the dataset’s class imbalance. Since types like “Deadpan” appear more frequently than others such as “Manic” or “Polite,” raw accuracy metrics may disproportionately reflect dominant class performance. Macro-averaged F1 provides a more balanced evaluation by weighting each class equally. The higher F1 scores observed under emotion-based prompting suggest that emotional cues may help LLMs better distinguish between low-frequency categories, even in the absence of detailed reasoning steps.

True Label	deadpan	36	2	1	3	1	2	0	63
	raging	1	3	0	2	0	2	1	3
	polite	16	0	9	0	1	3	0	58
	brooding	6	0	1	2	3	4	2	15
	self-depr.	2	0	1	1	6	0	0	13
	obnoxious	14	0	5	1	5	17	0	27
	manic	1	0	1	0	0	0	1	2
	not	13	0	4	2	3	5	3	320
		deadpan	raging	polite	brooding	self-depr.	obnoxious	manic	not
		Predicted Label							

Figure 4: Confusion Matrix for Claude 3.5 Sonnet using CoT.

5.2 Classification Confusion Analysis

While models showed moderate success identifying sarcastic utterances, they struggled to accurately categorize specific sarcasm types. Figure 4 shows that most models, including GPT4o, Claude 3.5 Sonnet, and Gemini 2.5, frequently defaulted to labeling content as either “not sarcastic” or “deadpan sarcasm” when uncertain. Deadpan emerged as the

most frequent misclassification across all sarcasm types, underscoring its role as a default or fallback label in ambiguous cases.

This trend reveals a key limitation: although LLMs can sometimes detect cues associated with sarcastic tone, they often conflate subtle, flat, or ambiguous language with sarcasm—even when none is present. The frequent misclassification of non-sarcastic utterances as “deadpan” indicates that models are over-reliant on surface-level features such as flat affect or contrastive phrasing, rather than grounded pragmatic reasoning. As a result, fine-grained differentiation among sarcasm subtypes remains a substantial challenge. Improving model sensitivity to context and disambiguation of neutral tone from intentional sarcasm is critical for more accurate multi-class sarcasm detection.

Subtype	CoT	Emotion-based	Human
Brooding sarcasm	6.06%	9.09%	39.39%
Deadpan sarcasm	33.03%	50.46%	55.45%
Polite sarcasm	10.34%	33.33%	57.30%
Manic sarcasm	20.00%	20.00%	75.00%
Obnoxious sarcasm	24.64%	39.13%	67.14%
Raging sarcasm	25.00%	41.67%	71.43%
Self-deprecating sarcasm	26.09%	34.78%	86.96%
Not sarcasm	91.17%	66.38%	95.04%

Table 5: Per-class Accuracy for Claude 3.5 using CoT vs. Emotion-based Prompting, Along-side Human Agreement.

Table 5 shows that emotion-based prompting yields consistent relative improvements over CoT prompting, though absolute accuracy remains below the human ceiling. In particular, brooding gains +3.04%, polite +23.0 %, deadpan +17.47 %, and raging +16.67 %, demonstrating that emotion cues help disambiguate more subtle tones. Conversely, “not sarcasm” drops by −24.82 %, indicating that adding emotion information can sometimes introduce noise for clear non-sarcastic cases. These shifts confirm that emotion-based prompts move the model closer to human-level nuance on mid-difficulty classes, but the largest remaining gaps still align with the hardest human distinctions—especially brooding, deadpan, and polite sarcasm—suggesting the need for richer contextual and pragmatic reasoning beyond fixed emotion settings.

From a pragmatic standpoint, these patterns show that fixed emotion cues can help LLMs avoid the default “deadpan” trap in nuanced cases, but true conversational implicature often depends on richer context and iterative hypothesis testing. The persistent gaps on brooding, deadpan, and polite highlight subtypes whose disambiguation relies heavily on prosodic and interpersonal cues—elements our current text-only prompting cannot capture. Future work should integrate dialogue history, world knowledge, or multimodal signals to approximate the full pragmatic reasoning humans employ.

5.3 Prompt Technique Analysis

Emotion-based prompting, which explicitly models the listener’s pragmatic hypothesis—“What emotion is intended here?”—yields higher macro-F1, demonstrating better performance on low-frequency sarcasm subtypes, indicating that discrete emotional cues guide LLMs toward the correct implicature when literal context is sparse. In contrast, CoT prompting excels at overall accuracy by simulating pragmatic inference, but can overlook subtler emotional distinctions; this trade-off underscores the need to balance structured reasoning with direct emotion signals when modeling conversational implicature in multi-class sarcasm.

One possible explanation for few-shot prompting achieving a higher macro-F1 score than CoT, despite CoT’s higher overall accuracy, is its directness. The concrete examples in few-shot prompts may provide a stronger signal for rare classes, which a macro-F1 score weights heavily. In contrast, the abstract reasoning steps of CoT may inadvertently bias the model towards the more frequent ‘deadpan’ or ‘not sarcastic’ labels.

5.4 Qualitative Error Analysis

Despite strong binary performance, models often misclassify playful language as sarcasm. Consider the following example:

Utterance: A lane frequented by liars. Like you, you big liar!
Context: HOWARD: I just Googled "foo-foo little dogs."
 HOWARD: (Skype ringing) It's Raj. Stay quiet.
 HOWARD: (chuckles): Hey!
 Bad timing.
 Bernadette just took Cinnamon out for a walk.
 RAJ: Hmm. Interesting.
 Did they take a walk down Liars' Lane?
 HOWARD: What?

The true label is *not sarcastic*, yet all models predicted *obnoxious sarcasm*. The CoT prompt overemphasized surface-level markers such as exaggeration and contradiction, failing to consider the light tone of the exchange. Similarly, the emotion-based prompt misclassified the utterance by identifying "disgust" due to literal wording, despite the playful social context. These errors highlight a broader limitation: while structured prompting improves reasoning, both CoT and emotion-based methods lack sensitivity to pragmatic cues and interpersonal intent in conversational sarcasm.

5.5 Generation Results and Analysis

Emotion-based prompting generated more accurate sarcasm types. Table 6 shows a 38.42% increase in accuracy using the emotion-based structure compared to the baseline model.

Prompt	Successful Generation
Zero-shot	52/100
Emotion-based	72/100

Table 6: Generation Evaluation Scores

For example, when prompted for raging sarcasm zero-shot prompting produced a neutral response:

"Oh, absolutely! I only stayed up until 3 AM because sleep is just so overrated, right?"

The emotion-based prompt with angry context and high shock value generated:

"Isn't that just fantastic? I mean, who wouldn't want to spend an entire day writing reports on how well we walk from our desks to the restroom? It's a dream come true!"

The baseline prompt's neutral context made it difficult to generate raging sarcasm, likely confusing it with deadpan due to the absence of anger cues. However, our emotion-based prompt was able to identify the anger in the statement and appropriately express it in its response. Explicit emotional cues helped generate more distinct sarcasm types. By structuring generation through pragmatic dimensions like context dependency and incongruity, our method implicitly guides the model to replicate speaker goals. See Appendix B for examples' context. Notably, brooding and manic sarcasm were the toughest for LLMs to generate. Brooding depends on a courteous veneer masking genuine frustration, a nuance carried by tone and pacing, not keywords, so single-turn prompts either over-polish or slip into blunt reproach. Manic sarcasm requires sustained, erratic enthusiasm that signals insincerity through vocal intensity; without prosody, models fall back on generic hyperbole. In both cases, missing nonverbal and contextual cues hinder authentic reproduction. Future work might integrate audio-text alignment or fine-tune on prosody-annotated dialogues to better capture these complex styles.

While multiple models were evaluated for the classification task, we selected Claude 3.5 Sonnet for generation due to its consistently strong performance in classification accuracy

and F1 score (see Table 3 and 4). Our primary goal in this benchmark was to explore how structured prompting techniques—particularly emotion-based prompting—affect the quality and controllability of sarcasm generation. By holding the model constant, we isolate the impact of the prompting strategy itself. Future work may extend this evaluation to other models such as GPT-4o and Gemini 2.5 to assess cross-model generalization.

6 Conclusions

We present Sarc7, the first benchmark to distinguish seven nuanced sarcasm subtypes and to evaluate both detection and controlled generation. Sarcasm, as a fundamentally pragmatic act, depends on interpreting intent, emotional incongruity, and social context beyond surface form. Sarc7 frames sarcasm understanding as a test of LLMs’ pragmatic competence and their ability to reason about speaker goals and context-sensitive meaning. In classification experiments, emotion-based prompts raised macro-averaged F1 scores—reaching 0.3664 with Gemini 2.5—while chain-of-thought prompting achieved the highest overall accuracy. A human baseline (Cohen’s $\kappa = 0.6694$) reveals that brooding, deadpan, and polite sarcasm remain the toughest subtypes to identify. For generations, structured prompts that specify incongruity, shock value, context dependency, and emotion improved subtype alignment by 38% over zero-shot prompts with Claude 3.5 Sonnet. By benchmarking both model and human performance, Sarc7 demonstrates LLMs’ ability to handle intentional, socially informed sarcasm and lays the groundwork for deeper pragmatic reasoning. Moving beyond binary detection to fine-grained, context-sensitive inference and generation, it enables more natural, emotion-aware dialogue agents and supports future multimodal and cross-lingual extensions.

7 Limitations

Our evaluation also surfaced key limitations to guide future work. First, while the process for annotating the MUsTARD dataset had a rigorous structure, and annotations were peer-reviewed for consistency, there is still room for annotator disagreement. Second, our forced single-label scheme and skewed class distribution (e.g. abundant deadpan vs. scarce manic examples) bias both annotation and model defaults; multi-label annotations and data balancing (e.g. weighted loss, augmentation) could mitigate this. Third, relying on Ekman’s six basic emotions overlooks finer affective states (irony, embarrassment) and may not transfer across languages or cultures—MUsTARD’s English-only dialogues underscore the need for richer emotion taxonomies and cross-lingual validation. Finally, and most critically, our evaluation is constrained by its reliance on purely textual data. Sarcasm is a fundamentally multimodal phenomenon, where meaning is often conveyed through non-textual cues like prosody (tone, pitch, and pacing), facial expressions, and gestures. The difficulty in generating authentic brooding or manic sarcasm, for instance, stems directly from the absence of vocal intensity and tonal nuance in text-only prompts. The persistent confusion between sincere statements and deadpan sarcasm further underscores this limitation, as the flat affective tone that defines this subtype is primarily an audio-visual cue. The absence of this multimodal context imposes a natural ceiling on the performance of any text-based system and is a key factor behind the modest classification accuracies observed. Future work must move towards integrating multimodal signals to capture the full pragmatic richness of human communication.

8 Reproducibility Statement

All data and code required to reproduce the findings of this study are publicly available at: <https://github.com/langlglang/sarc7> under an apache 2.0 license. All prompts are included in the appendix.

References

Anthropic. The claude 3 model family: Opus, sonnet, haiku. *Anthropic Report*, 2024.

- Prasanna Biswas, Anupama Ray, and Pushpak Bhattacharyya. Computational model for understanding emotions in sarcasm: A survey. *CFILT Technical Report, Indian Institute of Technology Bombay*, 2019.
- Santiago Castro, Devamanyu Hazarika, Verónica Pérez-Rosas, Roger Zimmermann, Rada Mihalcea, and Soujanya Poria. Towards multimodal sarcasm detection (an .Obviously_ perfect paper). In Anna Korhonen, David Traum, and Lluís Màrquez (eds.), *Proceedings of the 57th Annual Meeting of the Association for Computational Linguistics*, pp. 4619–4629, Florence, Italy, July 2019. Association for Computational Linguistics. doi: 10.18653/v1/P19-1455. URL <https://aclanthology.org/P19-1455/>.
- Google DeepMind, Rohan Anil, Stefano Arolfo, Igor Babuschkin, Lucas Beyer, Maarten Bosma, and ... Gemini: A family of highly capable multimodal models. *arXiv preprint arXiv:2312.11805*, 2023.
- Paul Ekman. Are there basic emotions? *Psychological Review*, 99(3), 1992.
- Montgomery Gole, Williams-Paul Nwadiugwu, and Andriy Miranskyy. On sarcasm detection with openai gpt-based models. In *2024 34th International Conference on Collaborative Advances in Software and COmputiNg (CASCON)*, pp. 1–6. IEEE, 2024.
- Nivin A Helal, Ahmed Hassan, Nagwa L Badr, and Yasmine M Afify. A contextual-based approach for sarcasm detection. *Scientific Reports*, 14(1):15415, 2024.
- J. Richard Landis and Gary G. Koch. The measurement of observer agreement for categorical data. *Biometrics*, 33(1):159–174, 1977.
- Joshua Lee, Wyatt Fong, Alexander Le, Sur Shah, Kevin Han, and Kevin Zhu. Pragmatic metacognitive prompting improves llm performance on sarcasm detection. *arXiv preprint arXiv:2412.04509*, 2024.
- John S Leggitt and Raymond W Gibbs. Emotional reactions to verbal irony. *Discourse processes*, 29(1):1–24, 2000.
- Meta AI. Llama-4-maverick-17b-128e-original. Hugging Face Model Hub: <https://huggingface.co/meta-llama/Llama-4-Maverick-17B-128E-Original>, 2024. Accessed: 2025-06-27.
- OpenAI. Gpt-4o system card. *arXiv preprint arXiv:2410.21276*, 2024.
- Sawsan Abdul-Muneim Qasim. A critical pragmatic study of sarcasm in american and british social interviews. 2021. URL https://www.researchgate.net/publication/363925404_A_Critical_Pragmatic_Study_of_Sarcasms_in_American_and_British_Interviews.
- Ellen Riloff, Aditya Qadir, Prajakta Surve, Lakshika De Silva, Nisheeth Gilbert, and Ruihong Huang. Sarcasm as contrast between a positive sentiment and negative situation. In *Proceedings of the 2013 Conference on Empirical Methods in Natural Language Processing*, pp. 704–714. ACL, 2013.
- Stephen Skalicky and Scott Crossley. Linguistic features of sarcasm and metaphor production quality. *Proceedings of the Workshop on Figurative Language Processing*, 2018.
- Qwen Team. Qwen2.5 technical report. *arXiv preprint arXiv:2412.15115*, 2024.
- Ben Yao, Yazhou Zhang, Qiuchi Li, and Jing Qin. Is sarcasm detection a step-by-step reasoning process in large language models? *arXiv preprint arXiv:2407.12725*, 2024.
- Yazhou Zhang, Chunwang Zou, Zheng Lian, Prayag Tiwari, and Jing Qin. Sarcasmbench: Towards evaluating large language models on sarcasm understanding. *arXiv preprint arXiv:2408.11319*, 2024.
- Xingjie Zhuang, Fengling Zhou, and Zhixin Li. Multi-modal sarcasm detection via knowledge-aware focused graph convolutional networks. *ACM Transactions on Multimedia Computing, Communications and Applications*, 2025.

Ari Tantra Zuhri and Rakhmat Wahyudin Sagala. Irony and sarcasm detection on public figure speech. *Journal of Elementary School Education*, 1(1):41–45, 2022. doi: 10.1234/joese.v1i1.13. URL <https://journal.berpusi.co.id/index.php/joese/article/view/13>.

A Classification Statistics

Below are the macro-averaged precision, recall, and F1 scores for all prompting techniques.

Model	Precision	Recall	F1 Score
GPT-4o	0.2104	0.2073	0.2089
Claude 3.5 Sonnet	0.2982	0.2960	0.2964
Gemini 2.5	0.2703	0.2824	0.2760
Llama-4 Maverick	0.2173	0.2196	0.2184
Qwen 2.5	0.2217	0.2025	0.2116

Table 7: Macro-averaged Precision, Recall, and F1 under Xero-shot Prompting.

Model	Precision	Recall	F1 Score
GPT-4o	0.3067	0.3469	0.3255
Claude 3.5 Sonnet	0.3322	0.3669	0.3487
Gemini 2.5	0.3233	0.3314	0.3274
Llama-4 Maverick	0.2314	0.2361	0.2340
Qwen 2.5	0.2461	0.1794	0.2075

Table 8: Macro-averaged Precision, Recall, and F1 under Few-shot Prompting.

Model	Precision	Recall	F1 Score
GPT-4o	0.2682	0.2668	0.2674
Claude 3.5 Sonnet	0.2903	0.2148	0.2471
Gemini 2.5	0.3178	0.3106	0.3141
Llama-4 Maverick	0.2116	0.1970	0.2040
Qwen 2.5	0.2063	0.2038	0.2052

Table 9: Macro-averaged Precision, Recall, and F1 under CoT prompting.

Model	Precision	Recall	F1 Score
GPT-4o	0.2140	0.2331	0.2233
Claude 3.5 Sonnet	0.3322	0.3669	0.3487
Gemini 2.5	0.3388	0.3990	0.3664
Llama-4 Maverick	0.2936	0.2753	0.2841
Qwen 2.5	0.2352	0.1933	0.2124

Table 10: Macro-averaged Precision, Recall, and F1 under Emotion-based Prompting.

B Generation Output

Below is an example of zero-shot and emotion-based generation results.

Sarcasm Generation Example

Emotion-based prompting was able to generate more targeted sarcasm types. For example, in the case of a contextually neutral statement, the baseline model produced a generic sarcastic response.

Zero-Shot Conversation:

- Speaker A: Did you finish the presentation for tomorrow's big meeting?
- Speaker B: Oh, absolutely! I only stayed up until 3 AM because sleep is just so overrated, right?
- Speaker A: Wow, sounds like you're thrilled about your life choices.

Zero-Shot Sarcastic Utterance:

- Speaker B: *Oh, absolutely! I only stayed up until 3 AM because sleep is just so overrated, right?*

Emotion-Based Context:

- Speaker A: Hey, did you see those new management rules they rolled out today?
- Speaker B: Oh yes, they're really something else. Now, we're going to document every minute of our bathroom breaks.
- Speaker A: Isn't that just fantastic? I mean, who wouldn't want to spend an entire day writing reports on how well we walk from our desks to the restroom? It's a dream come true!

Emotion-Based Sarcastic Utterance:

- Speaker A: *Isn't that just fantastic? I mean, who wouldn't want to spend an entire day writing reports on how well we walk from our desks to the restroom? It's a dream come true!*

C Prompts

Below are the zero-shot, few-shot, sarcasm analysis, and emotion-based prompts.

Zero-shot Prompt

You are tasked with determining the sarcasm type in a given statement. Read the statement carefully and classify the sarcasm type based on the context of the statement. Use one of the following categories:

- Self-deprecating sarcasm – mocking oneself
- Brooding sarcasm – passive-aggressive or emotionally repressed
- Deadpan sarcasm – flat or emotionless tone
- Polite sarcasm – fake politeness or ironic compliments
- Obnoxious sarcasm – mocking, mean-spirited, or rude
- Raging sarcasm – angry, exaggerated, or harsh
- Manic sarcasm – unnaturally cheerful, overly enthusiastic

If the statement is **not sarcastic**, **Output**: [not sarcasm]

If the statement is **sarcastic**, **Output**: [Type of Sarcasm]

Sarcasm Type Classification Prompt (Few-Shot)

You are tasked with determining the sarcasm type in a given statement. Read the statement carefully and classify the sarcasm type based on the context of the statement. Use one of the following categories:

- Self-deprecating sarcasm – mocking oneself
- Brooding sarcasm – passive-aggressive or emotionally repressed

- Deadpan sarcasm – flat or emotionless tone
- Polite sarcasm – fake politeness or ironic compliments
- Obnoxious sarcasm – mocking, mean-spirited, or rude
- Raging sarcasm – angry, exaggerated, or harsh
- Manic sarcasm – unnaturally cheerful, overly enthusiastic

If the statement is **not sarcastic**, **Output:** [not sarcasm]

If the statement is **sarcastic**, **Output:** [Type of Sarcasm]

Examples:

A person might say, “Your new shoes are just fantastic,” to indicate that the person finds a friend’s shoes distasteful.

Output: [Polite sarcasm]

A socially awkward person might say, “I’m a genius when it comes to chatting up new acquaintances.”

Output: [Self-deprecating sarcasm]

A person who is asked to work overtime at one’s job might respond, “I’d be happy to miss my tennis match and put in the extra hours.”

Output: [Brooding sarcasm]

A person who is stressed out about a work project might say, “The project is moving along perfectly, as planned. It’ll be a winner.”

Output: [Manic sarcasm]

When asked to mow the lawn, a person might respond by yelling, “Why don’t I weed the gardens and trim the hedges too? I already do all of the work around the house.”

Output: [Raging sarcasm]

A person might say, “I’d love to attend your party, but I’m headlining in Vegas that evening,” with a straight face, causing others to question whether they might be serious.

Output: [Deadpan sarcasm]

A person’s friend may offer a ride to a party, prompting the person to callously answer, “Sure. I’d love to ride in your stinky rust bucket.”

Output: [Obnoxious sarcasm]

CoT Prompt

You are a sarcasm analyst. Your task is to determine whether a speaker’s utterance is sarcastic or sincere. Only if you are reasonably confident the speaker is being sarcastic—based on tone, behavior, and contradiction between words and context—classify it into a subtype. If there is no strong evidence of sarcasm (no exaggeration, no mismatch, no insincere tone), assume the speaker is genuine.

Think step by step:

1. Analyze speaker delivery and tone.
2. Check whether their words contradict the situation.
3. Ask: “Could a sincere person say this the same way?”
 - If yes: **Output:** [not sarcasm]
 - Otherwise: proceed to step 4.
4. Match to one of the following subtypes:
 - Self-deprecating sarcasm
 - Brooding sarcasm
 - Deadpan sarcasm
 - Polite sarcasm
 - Obnoxious sarcasm
 - Raging sarcasm
 - Manic sarcasm

Format your answer like this:

Utterance: <the target utterance>
Context: <brief dialogue or situation>
Reasoning:
- <first reasoning bullet>
- <second reasoning bullet>
- ...
Output: [Type of Sarcasm]

Example: Utterance: "Oh yeah, I love getting stuck in traffic for hours." Context: (Someone is running late and stuck in traffic.) Reasoning:

- Uses exaggeration ("love") about a negative event.
- Clear mismatch between words and reality.
- Tone is bitter and frustrated.

Output: [Brooding sarcasm]

Emotion-based Prompt

You are an expert sarcasm and emotion analyst. For every input statement, follow the steps below in order, using the context and speaker's delivery to reason carefully.

Step 1: Contextual Emotion Analysis

Analyze the emotional tone of the surrounding context or situation (i.e., what is happening before or around the statement). Consider what emotion would be appropriate or expected in that situation.

Select one dominant contextual emotion from this fixed list:

- Happiness
- Sadness
- Anger
- Fear
- Surprise
- Disgust
- Neutral (use only if no strong emotion applies)

Step 2: Utterance Emotion Analysis

Analyze the emotional tone of the bracketed statement itself based on word choice, delivery cues (e.g., exaggeration, flatness, enthusiasm), and stylistic tone.

Select one dominant utterance emotion from the same list:

- Happiness
- Sadness
- Anger
- Fear
- Surprise
- Disgust
- Neutral

Use only one label for each step. Do not guess outside this list.

Step 3: Emotional Comparison and Incongruity Detection

Compare the contextual emotion and the utterance emotion. If there is a mismatch (e.g., the situation is sad but the speaker sounds happy), explain whether this emotional contrast suggests mockery, irony, insincerity, passive aggression, or theatrical overreaction.

If no such contrast or ironic delivery is present, conclude that the statement is not sarcastic.

Step 4: Sarcasm Type Classification

If the statement is sarcastic, classify it using the emotional cues, delivery style, and social function into one of the following types:

- Self-deprecating sarcasm – mocking oneself
- Brooding sarcasm – passive-aggressive or emotionally repressed
- Deadpan sarcasm – flat or emotionless tone
- Polite sarcasm – fake politeness or ironic compliments
- Obnoxious sarcasm – mocking, mean-spirited, or rude
- Raging sarcasm – angry, exaggerated, or harsh
- Manic sarcasm – unnaturally cheerful, overly enthusiastic

Step 5: Final Output

Clearly output the final classification on a new line in this exact format:

- If sarcastic: [Type of Sarcasm]
- If not sarcastic: [Not Sarcasm]

Sarcasm Generation Prompt

You are a sarcasm simulation system. Create a short fictional dialogue that includes a clearly sarcastic utterance. Use the inputs below to guide the tone and structure.

Parameters:

- Incongruity Rating (1–10): incongruity
- Shock Value: shock_value
- Context Dependency: context_dependency
- Emotion of Sarcastic Utterance: emotion

Output format:

Conversation:

Speaker A: ...

Speaker B: ...

Speaker A: ...

(At least 3 turns)

Sarcastic Utterance: (copy the sarcastic utterance exactly here)

Sarcasm Type: (Self-deprecating, Brooding, Deadpan, Polite, Obnoxious, Raging, or Manic)

Emotion: {emotion}

Incongruity Rating: {incongruity}

Shock Value: {shock_value}

Context Dependency: {context_dependency}

D Misclassification

Below are tables indicating the most misclassified sarcasm type for each sarcasm type for each of the prompting techniques.

E Misclassification

Below are tables indicating the most misclassified sarcasm type for each sarcasm type for each of the prompting techniques.

Type	GPT-4o	Claude 3.5 Sonnet	Gemini 2.5	Llama-4 Maverick	Qwen 2.5
Deadpan	Not Sarcastic	Not Sarcastic	Obnoxious	Polite	Not Sarcastic
Obnoxious	Not Sarcastic	Deadpan	Deadpan	Deadpan	Deadpan
Brooding	Obnoxious	Deadpan	Deadpan	Deadpan	Deadpan
Polite	Not Sarcastic	Deadpan	Deadpan	Deadpan	Not Sarcastic
Raging	Obnoxious	Deadpan	Obnoxious	Obnoxious	Obnoxious
Manic	Not Sarcastic	Deadpan	Obnoxious	Deadpan	Not Sarcastic
Self-deprecating	Not Sarcastic	Deadpan	Deadpan	Deadpan	Deadpan
Not Sarcastic	Obnoxious	Deadpan	Deadpan	Deadpan	Deadpan

Table 11: Most Frequent Misclassifications per Type using Zero-Shot Prompting

Type	GPT-4o	Claude 3.5 Sonnet	Gemini 2.5	Llama-4 Maverick	Qwen 2.5
Deadpan	Not Sarcastic	Not Sarcastic	Obnoxious	Polite	Not Sarcastic
Obnoxious	Deadpan	Deadpan	Deadpan	Deadpan	Deadpan
Brooding	Deadpan	Deadpan	Deadpan	Deadpan	Deadpan
Polite	Not Sarcastic	Not Sarcastic	Not Sarcastic	Deadpan	Not Sarcastic
Raging	Obnoxious	Deadpan	Obnoxious	Obnoxious	Obnoxious
Manic	Raging	Self-deprecating	Obnoxious	Obnoxious	Not Sarcastic
Self-deprecating	Deadpan	Not Sarcastic	Deadpan	Deadpan	Deadpan
Not Sarcastic	Obnoxious	Deadpan	Deadpan	Deadpan	Deadpan

Table 12: Most Frequent Misclassifications per Type using Few-Shot Prompting

Type	GPT-4o	Claude 3.5 Sonnet	Gemini 2.5	Llama-4 Maverick	Qwen 2.5
Deadpan	Not Sarcastic	Not Sarcastic	Not Sarcastic	Not Sarcastic	Not Sarcastic
Obnoxious	Deadpan	Not Sarcastic	Deadpan	Deadpan	Deadpan
Brooding	Deadpan	Not Sarcastic	Deadpan	Deadpan	Deadpan
Polite	Not Sarcastic	Not Sarcastic	Not Sarcastic	Deadpan	Not Sarcastic
Raging	Deadpan	Not Sarcastic	Obnoxious	Deadpan	Obnoxious
Manic	Brooding	Not Sarcastic	Not Sarcastic	Deadpan	Brooding
Self-deprecating	Not Sarcastic	Not Sarcastic	Not Sarcastic	Deadpan	Not Sarcastic
Not Sarcastic	Deadpan	Deadpan	Deadpan	Deadpan	Deadpan

Table 13: Most Frequent Misclassifications per Type using CoT Prompting

Type	GPT-4o	Claude 3.5 Sonnet	Gemini 2.5	Llama-4 Maverick	Qwen 2.5
Deadpan	Not Sarcastic	Not Sarcastic	Not Sarcastic	Obnoxious	Not Sarcastic
Obnoxious	Deadpan	Deadpan	Deadpan	Deadpan	Not Sarcastic
Brooding	Deadpan	Deadpan	Deadpan	Obnoxious	Not Sarcastic
Polite	Deadpan	Deadpan	Not Sarcastic	Not Sarcastic	Not Sarcastic
Raging	Brooding	Deadpan	Obnoxious	Obnoxious	Not Sarcastic
Manic	Polite	Not Sarcastic	Self-deprecating	Obnoxious	Not Sarcastic
Self-deprecating	Deadpan	Not Sarcastic	Not Sarcastic	Deadpan	Not Sarcastic
Not Sarcastic	Deadpan	Deadpan	Deadpan	Obnoxious	Deadpan

Table 14: Most Frequent Misclassifications per Type using Emotion-Based Prompting